


020-5372-0 4 3 2 1




NOTES:
 ELECTRICAL CHARACTERISTICS: TESTING IS PERFORMED AT 25°C ±5°C
 (UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
 (FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION))

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 115 V, 50Hz	29.14 MAX	mA
2	P _w o: @ NO LOAD	INPUT 115 V, 50Hz	1.89 MAX	W
3	U _o : @ NO LOAD	INPUT 115 V, 50Hz	19.4 ±10%	V
4	I _e : CURRENT WITH LOAD	INPUT 115 V, 50Hz	28.67 MAX	mA
5	P _w e: WATTAGE WITH LOAD	INPUT 115 V, 50Hz	2.36 MAX	W
6	U _c : NOMINAL LOAD	INPUT 115 V, 50Hz AT LOAD 42 mA	12	V
7	HI-POT: (1,4) TO (6,7)	/	4000VAC, 2 SEC	

MECHANICAL SPEC NOTES:
 1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS ±0.20MM.
 2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.



SCHEMATIC

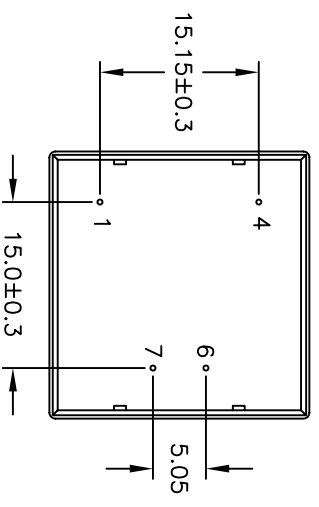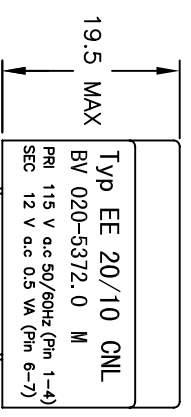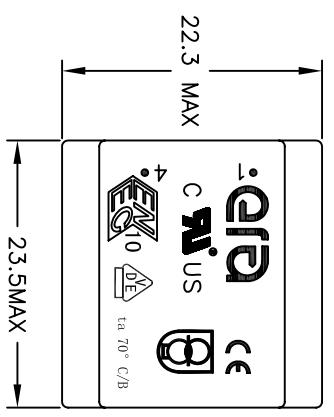

FINAL OUTLINE

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 DECIMALS .XX ±0.1 ANGLES ±1°
 .XXX ±0.005
 DO NOT SCALE DRAWINGS

SIZE: B01961
 DWG. NO.: 020-5372-0
 SCALE: NONE
 SHEET: 1 OF 1
 REV: 14

13007204