

020-5382-0

4

3

2


1

NOTES:  
 ELECTRICAL CHARACTERISTICS: TESTING IS PERFORMED AT 25°C ±5°C  
 UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C  
 (FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)




ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	Io: @ NO LOAD	INPUT 230 V, 50HZ	13.8 MAX	mA
2	Pwo: @ NO LOAD	INPUT 230 V, 50HZ	1.9 MAX	W
3	Uo: @ NO LOAD	INPUT 230 V, 50HZ	8.9 ±10%	V
4	Ie:@CURRENT WITH LOAD	INPUT 230 V, 50HZ	12.3 MAX	mA
5	Pwe:@WATTAGE WITH LOAD	INPUT 230 V, 50HZ	2.4 MAX	W
6	Uo: @ NOMINAL LOAD	INPUT 230 V, 50HZ AT LOAD 83 mA	6	V
7	HI-POT: (1,4) TO (6,7)	/	4000VAC, 2 SEC	

MECHANICAL SPEC NOTES:

1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS F0.20MM
2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.

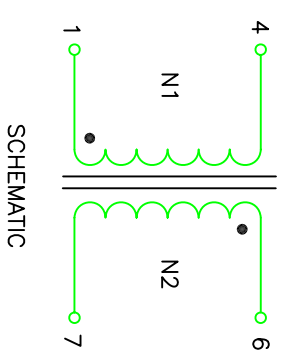

SCHMATIC

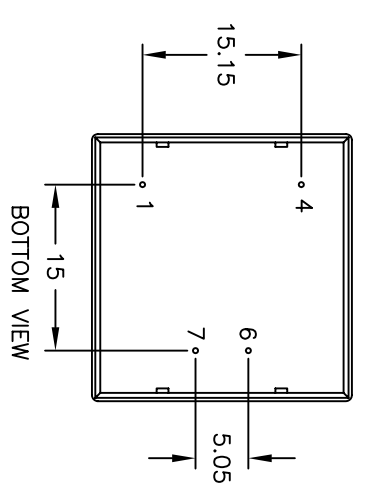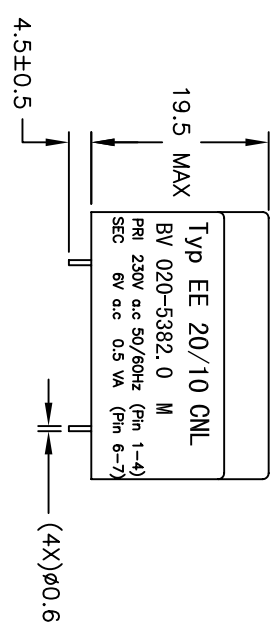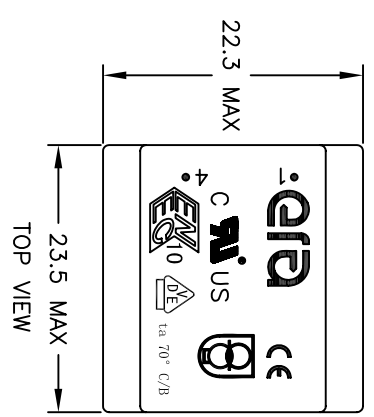

FINAL OUTLINE

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.  
 TOLERANCES ARE:  
 DECIMALS ±.01 ANGLES ±1°  
 .XXX ±.005  
 DO NOT SCALE DRAWINGS

SIZE: 020-5382-0  
 DWG. NO.: 020-5382-0  
 SHEET: 1 OF 1  
 REV: 14