

020-5470-0

4

3





2

1


NOTES:
ELECTRICAL CHARACTERISTICS: TESTING IS PERFORMED AT 25°C ±5°C
UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 115 V, 50Hz	MAX 22.20	mA
2	P _w o: @ NO LOAD	INPUT 115 V, 50Hz	MAX 2.00	W
3	U _o 1: @ NO LOAD	INPUT 115 V, 50Hz	9.20±10%	V
4	I _e : CURRENT WITH LOAD	INPUT 115 V, 50Hz	MAX 21.40	mA
5	P _w e: WATTAGE WITH LOAD	INPUT 115 V, 50Hz	MAX 2.00	W
6	U ₁ : NOMINAL LOAD	INPUT 115 V, 50Hz AT LOAD 13.3 mA	6	V
7	HI-POT: (1,4) TO (6,7)	/	4000VAC, 2 SEC	

MECHANICAL SPEC NOTES:
1. ALL DIMENSIONS ARE IN MM. GENERAL TOLERANCE IS 0.20 MM.
2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.

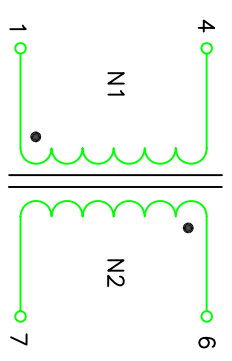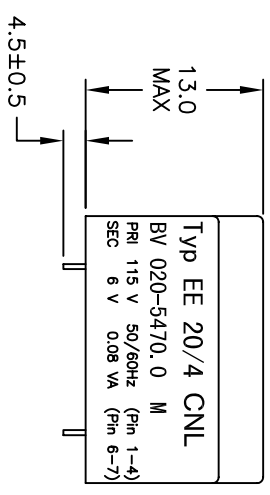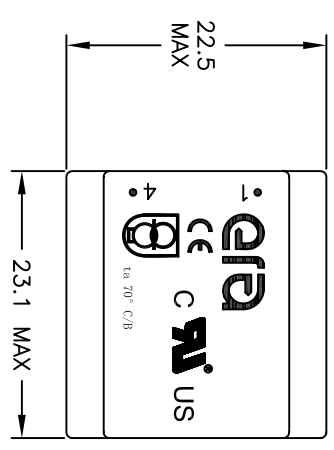

SCHEMATIC



FINAL OUTLINE

DWG. NO. 020-5470-0

SHEET 1 OF 1

REV 12