

020-5482-0

4

3

2





1

NOTES:
 ELECTRICAL CHARACTERISTICS:
 UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
 (FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 230 V, 50Hz	11.0 MAX	mA
2	P _w _o : @ NO LOAD	INPUT 230 V, 50Hz	2.0 MAX	W
3	U _o : @ NO LOAD	INPUT 230 V, 50Hz	18.3 ±10%	V
4	I _e :@CURRENT WITH LOAD	INPUT 230 V, 50Hz	10.9 MAX	mA
5	P _w _e :@WATTAGE WITH LOAD	INPUT 230 V, 50Hz	2.0 MAX	W
6	U _o :@NOMINAL LOAD	INPUT 230 V, 50Hz AT LOAD 6.67 mA	12	V
7	HI-POT: (1,4) TO (6,7)	/	4000VAC, 2 SEC	

MECHANICAL SPEC NOTES:

1. ALL DIMENSIONS ARE IN MM,GENERAL TOLERANCE IS ±0.20MM.
2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.

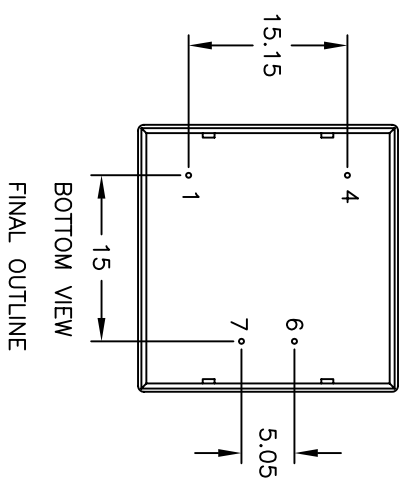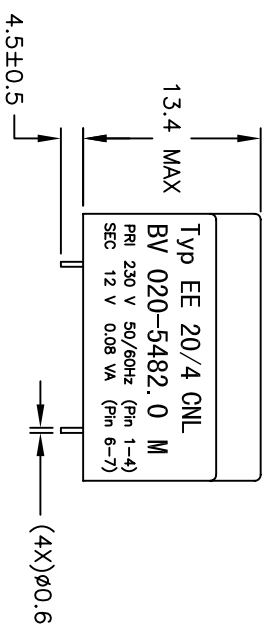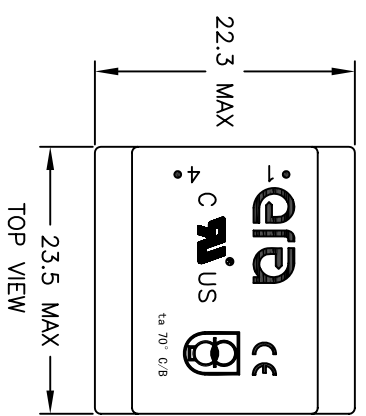

~~UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:~~
 DECIMAL ANGLES ±1°
 .XX ±0.1
 .XXX ±0.05
 DO NOT SCALE DRAWINGS

SIZE: B01961
 DWG. NO: 020-5482-0
 SHEET: 1 OF 1
 REV: 13