

030-7221-0

4

3





2

1

NOTES:

1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS 0.20MM;
2. ALL PINS LENGTH DON'T COUNT TIN ICICLES;
3. ELECTRICAL CHARACTERISTICS:
UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

| ITEM | SPECIFICATION | TEST CONDITIONS | VALUE | UNIT |
|------|---------------------------------------|-------------------------------------|----------------|------|
| 1 | I _o : @ NO LOAD | INPUT 115 V, 50Hz | MAX 26.30 | mA |
| 2 | P _w o: @ NO LOAD | INPUT 115 V, 50Hz | MAX 1.10 | W |
| 3 | U _o : @ NO LOAD | INPUT 115 V, 50Hz | 12.45±10% | V |
| 4 | I: @ CURRENT WITH LOAD | INPUT 115 V, 50Hz | MAX 27.30 | mA |
| 5 | P _w e: @ WATTAGE WITH LOAD | INPUT 115 V, 50Hz | MAX 3.20 | W |
| 6 | U _o : @ NOMINAL LOAD | INPUT 115 V, 50Hz AT LOAD 111 mA | 9.0 | V |
| 7 | HI-POT: (1,5) TO (7,9) | / | 4000VAC, 2 SEC | |
| 8 | RATED OUTPUT POWER | / | 1.0 | VA |

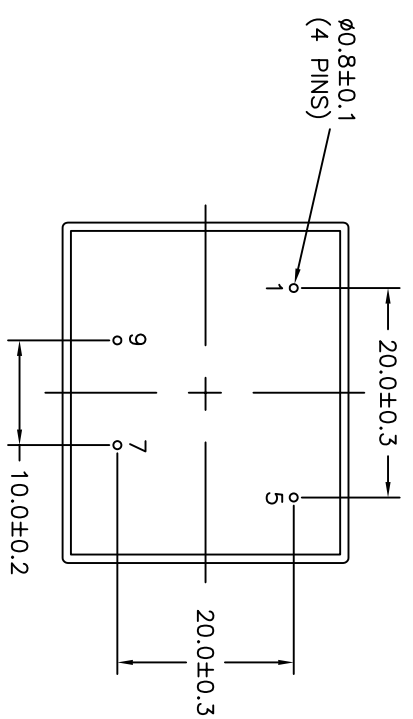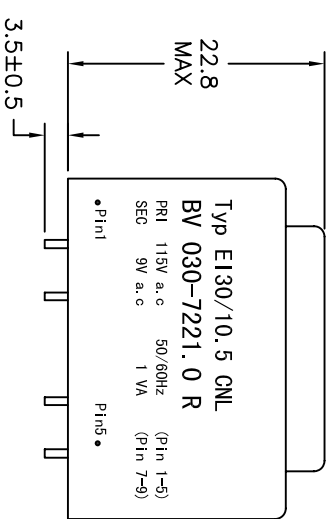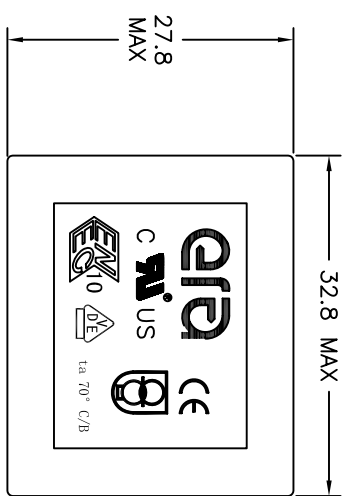

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:
 DECIMALS ±0.1
 ANGLES ±1°
 .XXX ±.005
 DO NOT SCALE DRAWINGS

SIZE: B01961
 DWG. NO: 030-7221-0
 SCALE: NONE
 SHEET: 1 OF 1
 REV: 13

130307204

4

3

2

1