

030-7233-0

4

3





2

1

NOTES:

1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS 0.20MM;
2. ALL PINS LENGTH DON'T COUNT TIN ICICLES;
3. ELECTRICAL CHARACTERISTICS:
UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 230 V, 50Hz	MAX 13.80	mA
2	P _w o: @ NO LOAD	INPUT 230 V, 50Hz	MAX 1.10	W
3	U _o : @ NO LOAD	INPUT 230 V, 50Hz	12.45±10%	V
4	I: @ CURRENT WITH LOAD	INPUT 230 V, 50Hz	MAX 14.30	mA
5	P _w e: @ WATTAGE WITH LOAD	INPUT 230 V, 50Hz	MAX 3.20	W
6	U _o : @ NOMINAL LOAD	INPUT 230 V, 50Hz AT LOAD 111 mA	9.0	V
7	HI-POT: (1,5) TO (7,9)	/	4000VAC, 2 SEC	
8	RATED OUTPUT POWER	/	1.0	VA

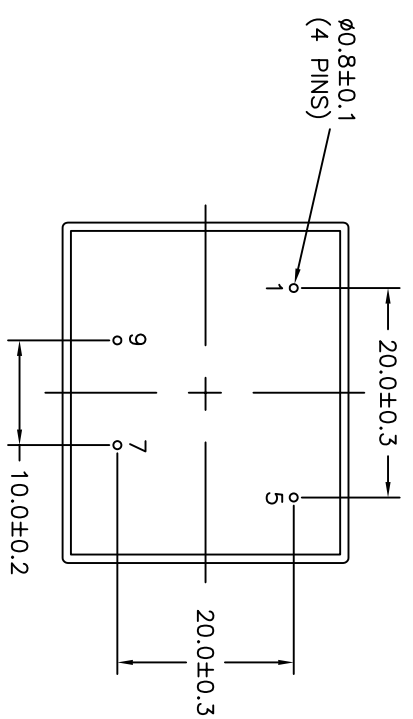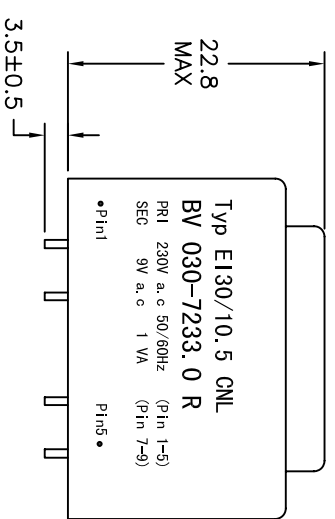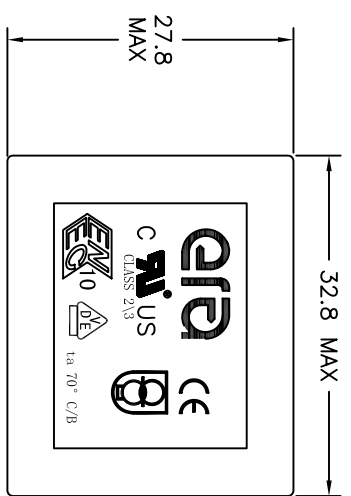

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:
DETAILS ±0.1
ANGLES ±1°
XXX ±.005
DO NOT SCALE DRAWINGS

SIZE: 030-7233-0
DRAWG. NO.: 030-7233-0
SHEET: 1 OF 1
REV: 14

