

030-7341-0

4

3


2

1




- NOTES:
1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS 0.20MM;
 2. ALL PINS LENGTH DON'T COUNT TIN ICICLES;
 3. ELECTRICAL CHARACTERISTICS:

UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 230 V, 50HZ	MAX 13.10	mA
2	P _w o: @ NO LOAD	INPUT 230 V, 50HZ	MAX 0.95	W
3	U _o : @ NO LOAD	INPUT 230 V, 50HZ	13.80±10%	V
4	I: @ CURRENT WITH LOAD	INPUT 230 V, 50HZ	MAX 25.25	mA
5	P _w e: @ WATTAGE WITH LOAD	INPUT 230 V, 50HZ	MAX 5.30	W
6	U _o : @ NOMINAL LOAD	INPUT 230 V, 50HZ AT LOAD 256 mA	9.0	V
7	HI-POT: (1,5) TO (7,9)	/	4000VAC, 2 SEC	
8	RATED OUTPUT POWER	/	2.3	VA



SCHEMATIC

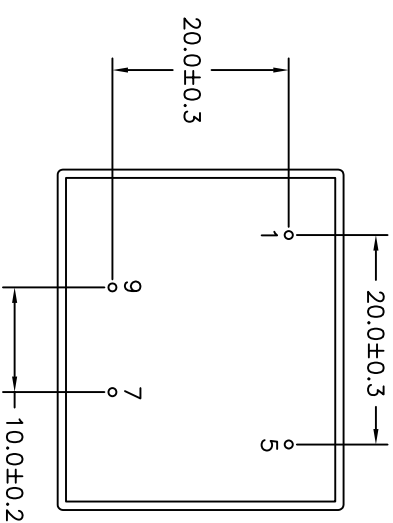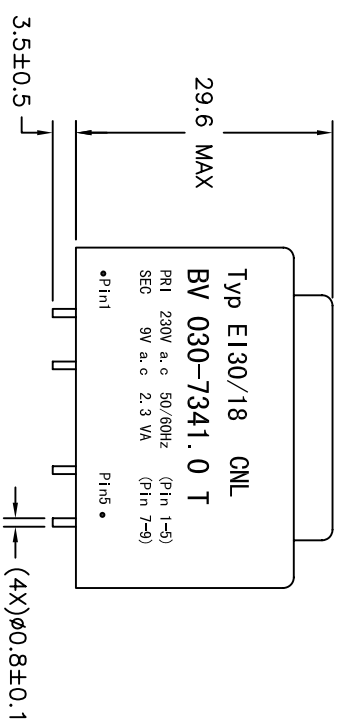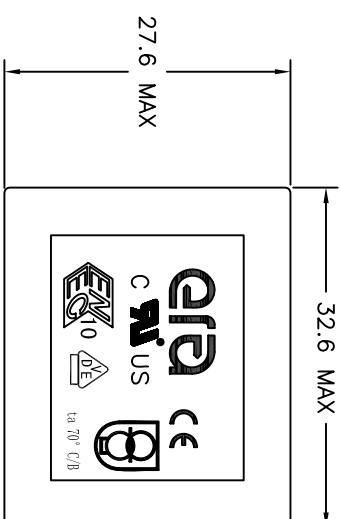

FINAL OUTLINE

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:
DIMENSIONS IN MILLIMETERS:
XX ±0.1
.XXX ±0.05
ANGLES ±1°
DO NOT SCALE DRAWINGS

SIZE / DWG. CODE
B01961

SCALE NONE

DWG. NO. 030-7341-0

SHEET 1 OF 1

REV 16

130372004

4

3

2

1

A

B

C

D

A

B

C

D