

030-7347-0

4

3




2

1

NOTES:

1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS 0.20MM;
2. ALL PINS LENGTH DON'T COUNT TIN ICICLES;
3. ELECTRICAL CHARACTERISTICS:
UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 230 V, 50Hz	MAX 13.10	mA
2	P _w : @ NO LOAD	INPUT 230 V, 50Hz	MAX 1.00	W
3	U _{o1} : @ NO LOAD	INPUT 230 V, 50Hz	14.00±10%	V
4	U _{o2} : @ NO LOAD	INPUT 230 V, 50Hz	14.00±10%	V
5	I: @ CURRENT WITH LOAD	INPUT 230 V, 50Hz	MAX 25.30	mA
6	P _w : @ WATTAGE WITH LOAD	INPUT 230 V, 50Hz	MAX 6.10	W
7	U1: @ NOMINAL LOAD	INPUT 230 V, 50Hz AT LOAD 128 mA	9.0	V
8	U2: @ NOMINAL LOAD	INPUT 230 V, 50Hz AT LOAD 128 mA	9.0	V
9	HI-POT: (1,5) TO (6,7)	/	4000VAC, 2 SEC	
10	HI-POT: (1,5) TO (9,10)	/	4000VAC, 2 SEC	
11	HI-POT: (6,7) TO (9,10)	/	1000VAC, 2 SEC	
12	RATED OUTPUT POWER	/	2.3	VA

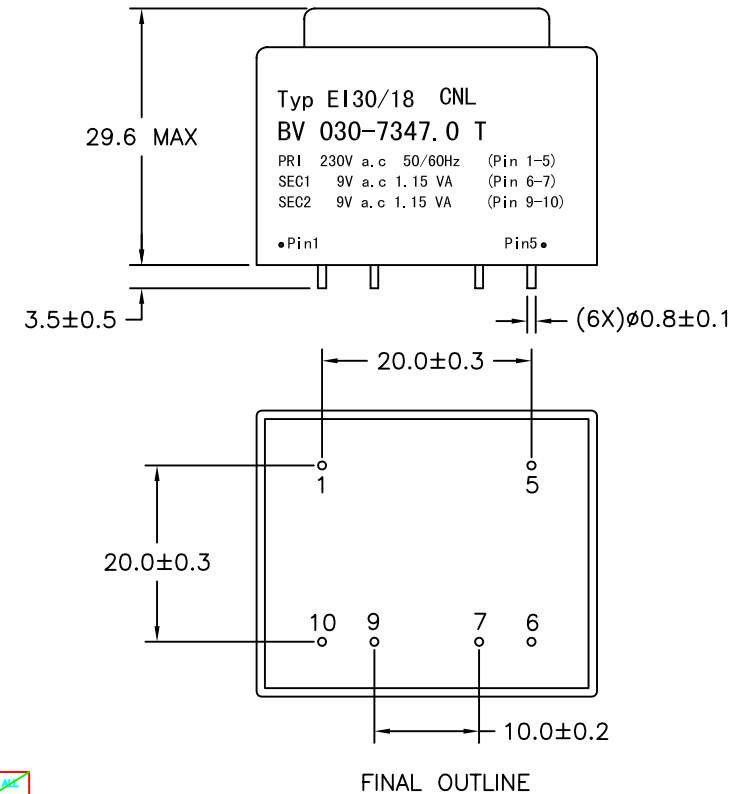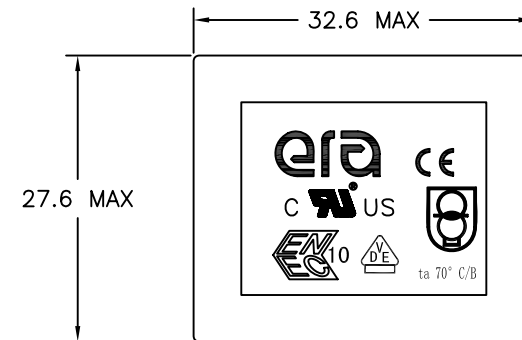

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. TOLERANCES ARE:
 DECIMALS ANGLES
 .XX ±.01 ± 1°
 .XXX ±.005
 DO NOT SCALE DRAWING

SIZE	CAGE CODE	DWG. NO.	REV
B01961		030-7347-0	14
SCALE NONE	CADD FILE	SHEET 1 OF 1	