

020-5370-0

4

3

2


1

NOTES:
 ELECTRICAL CHARACTERISTICS: TESTING IS PERFORMED AT 25°C ±5°C
 UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
 (FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)




ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 115 V, 50Hz	29.10 MAX	mA
2	P _w o: @ NO LOAD	INPUT 115 V, 50Hz	1.90 MAX	W
3	U _o : @ NO LOAD	INPUT 115 V, 50Hz	8.90 ±10%	V
4	I _e : CURRENT WITH LOAD	INPUT 115 V, 50Hz	28.70 MAX	mA
5	P _w e: WATTAGE WITH LOAD	INPUT 115 V, 50Hz	2.40 MAX	W
6	U _c : NOMINAL LOAD	INPUT 115 V, 50Hz AT LOAD 83 mA	6	V
7	HI-POT: (1,4) TO (6,7)	/	4000VAC, 2 SEC	

MECHANICAL SPEC NOTES:

1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS ±0.20MM.
2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.



SCHEMATIC

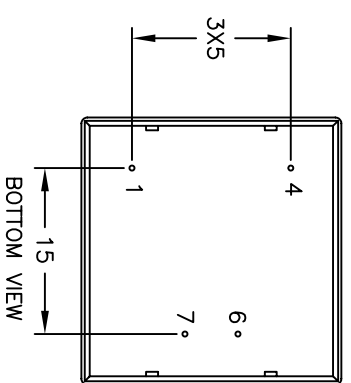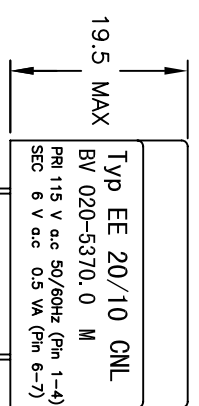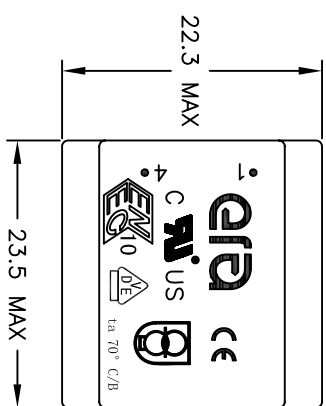

FINAL OUTLINE

~~UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. TOLERANCES ARE:~~
 .XX ±.01 ANGLES ±1°
 .XXX ±.005
 DO NOT SCALE DRAWINGS

SIZE	GRADE CODE	DWG. NO.	SHEET	REV
B01961	NONE	020-5370-0	1 OF 1	13

A

4

3

2

1

A

B

B

C

C

D

D